


# NS-1U8L (C236)

## Feature




1U 19" Rack Mount Network Security  
 Support 6<sup>th</sup> 7<sup>th</sup> 8<sup>th</sup> Desktop Core i3/i5/i7 CPU  
 Support 2\* DDR4 2133/2400 32G  
 Support 1\*M.2, 2\*2.5/3.5 inchs SATA;  
 Support 2\*PCI-E X8 Slot  
 Support 8\*Intel 1000M LAN  
 Applied OS:



## Specification

Model	NS-1U8L (C236)
Color	Black
Material	High Quality Steel
Processor	Intel Core i3-8100T (Quad Core, 4 thread, 3.1 GHz)
	Intel Core i5-8500T (6 Core, 6 thread, 2.1 GHz, Turbo boost to 3.5 GHz)
	Intel Core i7-8700T (6 Core, 12 thread, 2.4 GHz, Turbo boost to 4.0 GHz)
Chipset	<b>Intel C236</b>
Memory	Support 2*DDR4 2133/2400MHz SODIMM, MAX:32 GB
Display Port	1*VGA (1*HDMI can be expand)
Front I/O	1*RJ45 COM (support console function), 2*USB3.0, 8*Intel Gbe LAN
Front I/O	1*VGA, 1*power SW, 1*AC input port
Expansion	Support 2*PCI-E X8 (4*1000M LAN or 4*1000M SFP)
	Support 1*M.2 Slot (Support 2260/2280)
	Support 1*MINI PCIE (WIFI/BT/3G/4G is optional)
Network Port	8* Intel i211-AT 1000M LAN
Storage	Support 1*M.2 2280
	Support 2*2.5/3.5 inchs SATA
Input	110~240V/50~60Hz AC Input
Working Temp	-10°C ~ +50°C
Humidity	5% ~ 95% Non-condensing
Size	482 * 501 * 44.5mm
Weight	7.2 kg

# NS-1U8L (C236) Drawing

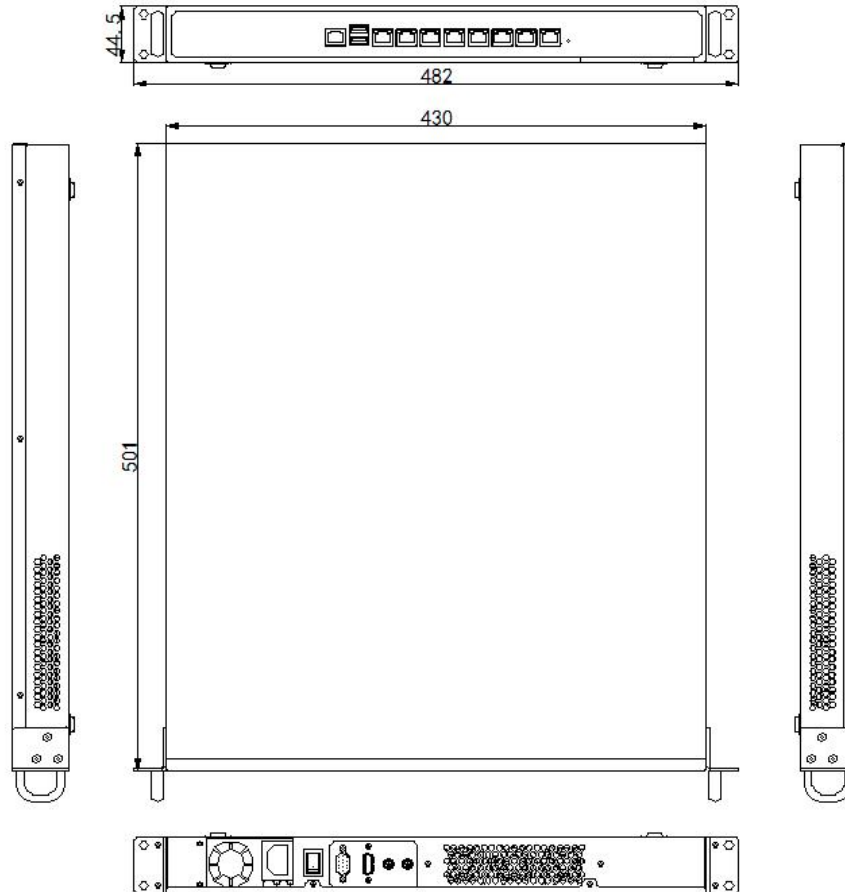

## Application:

Firewall, VPN, Network Server, Network Security, Router etc.

ACCESSORY		
Name	Number	Specification
Power Cord	1	Chinese, EU, USA plug etc
Rack Mount	2	Suitable for 19" rack mount

ORDER INFORMATION				
Configuration 1	NS-1U8L (C236)	Intel 6 <sup>th</sup> /7 <sup>th</sup> / 8 <sup>th</sup>	Core i3	Standard port
Configuration 2		Intel 6 <sup>th</sup> /7 <sup>th</sup> / 8 <sup>th</sup>	Core i5	Standard port
Configuration 3		Intel 6 <sup>th</sup> /7 <sup>th</sup> / 8 <sup>th</sup>	Core i7	Standard port